

i build



NovaShield®



# NOVASHIELD® RU88X-6 350


## STRONG AND LIGHT!

NovaShield® RU88X-6 350 is a heavyweight fabric for applications requiring UV stability, such as membrane structure end covers and landfill alternative daily covers. NovaShield's exclusive double-stacked scrim is a unique weave design offering strength and durability that our competitors don't have. Woven from high-density polyethylene slit tapes and coated on both sides with low-density polyethylene.



## FEATURES & BENEFITS

- Enhanced UV protection for longer service life
- Patented weave produces impressive strength-to-weight ratio
- Lightweight material making installation easier and faster while reducing cost
- Wider width (up to 144") means fewer seams and lower manufacturing costs
- Proprietary coating enhance abrasion and flex resistance, seam strength and longevity
- Dirt repelling LDPE coating
- Excellent tear resistance
- 5-year limited warranty

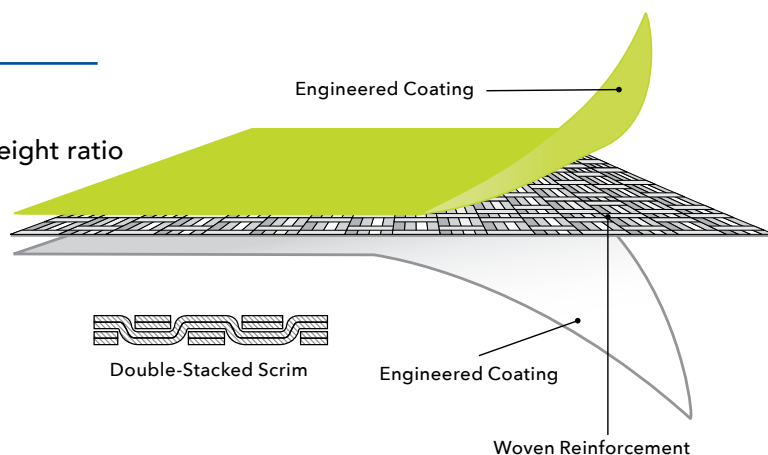

800-565-2000 | itape.com



## PRODUCT ATTRIBUTES

CHARACTERISTICS	Weave	Coating/Film	Thickness ASTM D1777	Weight	Cores	Width	Length	Colors	Limited Warranty
<b>NovaShield® RU88X-6 350</b>	Woven Clear HDPE Tapes	LDPE, 2.75 mil average each side (65 g/m <sup>2</sup> / side)	20 mils (0.50 mm)	10.5 oz/yd <sup>2</sup> ± 5% (356 gsm) ± 5%	4" or 5" I.D. available	Up to 144"	Minimum 250 yds to 1000 yds/roll	White	5 years

Grab Tensile	Strip Tensile	Tongue Tear	Trapezoidal Tear	Mullen Burst	Accelerated UV Weathering †	Low Temperature Bend
ASTM D5034	ASTM D5035	ASTM D2261	ASTM D4533	ASTM D3786	ASTM G154	ASTM 2136
Warp 370 lb (1664 N) Weft 350 lb (1554 N)	Warp 250 lb/in (2220 N/5cm) Weft 250 lb/in (2220 N/5cm)	Warp 125 lb (555 N) Weft 125 lb (555 N)	Warp 125 lb (555 N) Weft 120 lb (532 N)	Warp 655 psi (4512 kPa)	>90% strength retention after 2000 hrs exposure @ 0.77 W/m <sup>2</sup> / nm, or 1200 hrs exposure @ 1.35 W/m <sup>2</sup> /nm	-60°C

These values are typical data and are not intended as limiting specifications.

† Q.U.V [A-340 Lamps]; 8 hrs UV @ 60°C; 4 hrs condensation @ 50°C

## PRODUCT APPLICATIONS

- Membrane structure end covers
- Small warehouses
- Hay and feed storage
- Utility buildings
- Car ports

## MARKETS

- Agriculture
- Remediation and Restoration
- Marine
- Oil & Gas
- Industrial
- Public Works
- Mining



Scan for more info or visit [itape.com/novashield](http://itape.com/novashield)

